

532,276

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
13 May 2004 (13.05.2004)

PCT

(10) International Publication Number  
**WO 2004/040714 A1**

- (51) International Patent Classification<sup>7</sup>: **H01R 31/06**
- (21) International Application Number:  
PCT/US2003/031881
- (22) International Filing Date: 8 October 2003 (08.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
310419/2002 25 October 2002 (25.10.2002) JP
- (71) Applicant (for all designated States except US): **MOLEX INCORPORATED** [US/US]; 2222 Wellington Court, Lisle, IL 60532 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **KOJIMA, Yutaka** [JP/JP]; 141-3 Azumano, Seya-ku, Yokohama-shi, Kanagawa 246-0012 (JP). **HIRATA, Hideyuki** [JP/JP]; Nisshin Palace Stage Sakuragaoka 606, 2342-1 Fukudu, Yamato-shi, Kanagawa-ken 242-0024 (JP).
- (74) Agent: **CALDWELL, Stacey, E.**; Molex Incorporated, 2222 Wellington Court, Lisle, IL 60532 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MEMORY CARD ADAPTER FOR CONNECTING A MINIATURE CARD TO A STANDARD CARD CONNECTOR, ALONG WITH A METHOD OF FABRICATING SAME

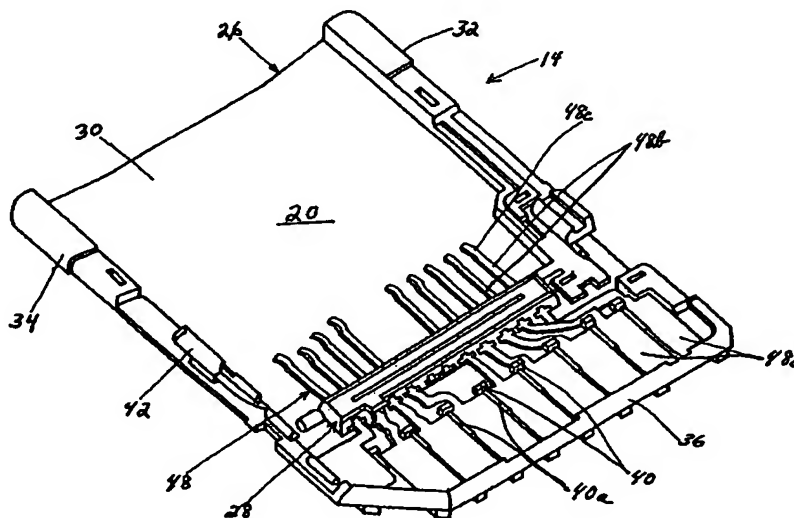

(57) Abstract: An adapter, along with a method of fabricating the adapter, for a memory card connector to enable a miniature memory card to be inserted into a larger, standard memory card connector. A two-part housing is provided of a size and shape to simulate a standard memory card. The housing includes a base housing part defining a substantial portion of an inner cavity for receiving a miniature memory card. An inner housing part is separate from and independent of the base housing part. A plurality of terminals are mounted on the inner housing part to define a subassembly which is mounted on the base housing part. Each terminal includes a first contact portion at one end thereof for engaging an appropriate contact on the standard memory card connector. Each terminal includes a second contact portion at an opposite end thereof for engaging an appropriate contact of the miniature memory card.

WO 2004/040714 A1

**MEMORY CARD ADAPTER FOR CONNECTING A  
MINIATURE CARD TO A STANDARD CARD CONNECTOR,  
ALONG WITH A METHOD OF FABRICATING SAME**

**Field of the Invention:**

This invention generally relates to the art of electrical connectors and, particularly, to the art of memory card connectors. The invention is specifically directed to a memory card adapter for allowing a miniature memory card to be inserted into a larger standard card  
5 connector. The invention also is directed to a method of fabricating the adapter.

**Background of the Invention:**

Memory cards are known in the art and contain intelligence in the form of a memory circuit or other electronic program. Some form of card reader reads the information or  
10 memory stored on the card. Such cards are used in many applications in today's electronic society, including video cameras, digital still cameras, smartphones, music players, ATMs, cable television decoders, toys, games, PC adapters, multi-media cards and other electronic applications. Typically, a memory card includes a contact or terminal array for connection through a card connector to a card reader system and then to external equipment. The  
15 connector readily accommodates insertion and removal of the card to provide quick access to the information and program on the card. The card connector includes terminals for yieldingly engaging the contact array of the memory card. Ejecting devices often are provided for facilitating inserting and ejecting the memory card to and from the card connector.

20 Because of the extensive use of memory cards in the many applications described above, the size and shape of many memory cards have become fairly standard. Correspondingly, the size of memory card connectors have become fairly standard. However, with the progress of miniaturization of many electronic devices, miniaturization of corresponding memory cards has also been realized. As a result, the card connectors  
25 designed for use with larger, standard memory cards cannot be used with the miniature cards without some modifications. Therefore, several types of adapters have been designed for mounting or inserting miniature cards into standard card connectors.

For example, Japanese Patent Laid-Open No. 5-233887 discloses an adapter for a card-like memory board. Japanese Patent Laid-Open No. 10-83434 discloses a card-like  
30 adapter for a miniature thin card. Japanese Patent Laid-Open No. 2000-3416 discloses a

contact adapter for a chip card. Japanese Patent Laid-Open No. 2000-214971 discloses an adapter for a Compact Flash card.

In the prior art adapters for card connectors as enumerated above, the adapter has one type of terminals provided at one end thereof for connection to the contacts of the card connector, and another type of terminals inside the adapter for connection to the contacts of the miniature card. These two types of terminals are electrically connected to each other by a circuit board installed in the adapter. For instance, in Japanese Patent Laid-Open No. 5-233887, above, reference numeral 4 in FIGS. 1 and 3 represents an electrical connection means corresponding to that circuit board. In Japanese Patent Laid-Open No. 10-83434, above, reference numeral 16 in FIG. 1 represents a connection means that corresponds to the circuit board. In Japanese Patent Laid-Open No. 2000-3416, above, reference numeral 21 in FIG. 3 represents means that correspond to the circuit board. In Japanese Patent Laid-Open No. 2000-214971, above, reference numeral 8 in FIG. 1 represents means that correspond to the circuit board.

Accordingly, the card connector adapters of the prior art include a built-in circuit board and two types of terminals each for connection with a card connector and with a miniature card. This causes problems and considerable expenses in that increased numbers of components, complicated construction and higher manufacturing costs are dominant. The present invention is directed to solving these various problems described above.

#### **Summary of the Invention:**

An object, therefore, of the invention is to provide a new and improved adapter for a memory card connector to enable a miniature card to be inserted into a larger standard card connector.

Another object of the invention is to provide a method of fabricating the new and improved adapter.

In the exemplary embodiment of the invention, the adapter includes a housing means of a size and shape to simulate a standard memory card. The housing means include an inner cavity for receiving a miniature memory card. A plurality of terminals are mounted on the housing means. Each terminal includes a first contact portion at one end thereof for engaging an appropriate contact on the standard memory card connector. A second contact portion at an opposite end of each terminal engages an appropriate contact of the miniature memory card. According to one aspect of the invention, the housing means include a base housing defining a substantial portion of the inner cavity, along with an inner housing on which the

terminals are mounted. The inner housing is separate from and independent of the base housing. The inner housing may be integrally welded to the base housing, such as by ultrasonic welding.

5 According to another aspect of the invention, the terminals are stamped and formed of conductive sheet metal material. The terminals have mounting sections between the opposite ends thereof. The mounting sections are press-fit into terminal-receiving passages in the inner housing to form a subassembly.

10 According to another aspect of the invention, a reinforcing plate is provided for supporting the housing means. The inner housing may comprise an elongated bar. As disclosed herein, the reinforcing plate comprises a narrow band, such as of metal material, running generally parallel to the elongated bar of the inner housing. The reinforcing plate includes a lock member engageable with the miniature memory card inserted into the inner cavity.

15 The invention also contemplates a method of fabricating the adapter described above. Specifically, the terminals are stamped and formed of sheet metal material. The terminals then are inserted into the terminal-receiving passages of the inner housing to form a subassembly. This subassembly then is assembled to the base housing of the housing means.

Other objects, features and advantages of the invention will be apparent from the following detailed description taken in connection with the accompanying drawings.

20

**Brief Description of the Drawings:**

The features of this invention which are believed to be novel are set forth with particularity in the appended claims. The invention, together with its objects and the advantages thereof, may be best understood by reference to the following description taken in conjunction with the accompanying drawings, in which like reference numerals identify like elements in the figures and in which:

FIG. 1 is a top perspective view of an adapter for a miniature memory card, incorporating the concepts of the invention and with the metal shell, reinforcing plate and cover plate removed to show the interior components of the adapter;

FIG. 2 is a perspective view similar to that of FIG. 1, with the metal shell and cover plate assembled to the housing means of the adapter;

FIG. 3 is a bottom perspective view of the adapter;

FIG. 4 is a top perspective view of the adapter, on a reduced scale, in conjunction with a standard card connector and a miniature memory card;

FIG. 5 is an enlarged perspective view of the inner housing of the adapter;

FIG. 6 is a perspective view of the terminals of the adapter as stamped to form a "blank" from a sheet of metal material, with the terminals still connected to a carrier strip;

FIG. 7 is a plan view of the stamped blank of FIG. 6;

FIG. 8 is a perspective view showing the terminals mounted in the terminal-receiving passages of the inner housing;

FIG. 9 is a view similar to that of FIG. 1, with the reinforcing plate assembled and the miniature card inserted into the housing means;

FIG. 10 is a vertical section taken generally along line 10-10 of FIG. 2, with the miniature card inserted into the adapter;

FIG. 11 is an enlarged, bottom perspective view of the reinforcing plate; and

FIG. 12 is an enlarged, fragmented perspective view of an area where the reinforcing plate is supported on the housing.

**Detailed Description of the Preferred Embodiment:**

Referring to the drawings in greater detail, and first to FIGS. 1-4, the invention is embodied in an adapter, generally designated 14, for use with a standard memory card connector, generally designated 16 (Fig. 4), to enable a miniature memory card, generally designated 18, to be inserted into the larger standard card connector. In other words, as seen in FIG. 4, the smaller miniature card 18 is inserted in the direction of arrow "A" into an inner cavity 20 of adapter 14 which, in turn, is inserted in the direction of arrow "B" into a receptacle 22 of the larger standard card connector 16 which has mating contacts 24.

Referring back to FIG. 1, adapter 14 includes a two-part housing means comprising a base housing part ("base housing"), generally designated 26, and an inner housing part ("inner housing"), generally designated 28. Each housing part may be unitarily molded of dielectric material such as plastic or the like. The base housing includes a bottom wall 30 and two side walls 32 and 34, along with a rear wall 36. Bottom wall 30 defines the bottom of inner cavity 20 and side walls 32 and 34 define opposite sides of the inner cavity which receives miniature card 18. As seen in FIG. 3, a plurality of open windows 38 are formed through bottom wall 30 in a side-by-side arrangement along the rear edge of the bottom wall. As seen in FIG. 1, a plurality of support projections having rearwardly extending partitions 40a project upwardly from the top of bottom wall 41 and are located between open windows 38. Finally, a release window 42 is formed in the bottom wall of the base housing along side wall 34.

Referring to FIG. 5 in conjunction with FIG. 1, inner housing 28 is molded into the form of an elongated bar having a plurality of terminal-receiving passages 44 extending therethrough. One of the passages 44a extends through a rearwardly projecting portion 46 of the inner housing. The inner housing is separate from and independent of base housing 26, and the inner housing can be secured to the top of bottom wall 30 of the base housing during assembly, as described below. For instance, a bottom surface 28a (Fig. 5) of the inner housing can be ultrasonically welded to the top surface of bottom wall 30 of base housing 26. The inner housing defines the inner wall of inner cavity 20.

Referring to FIGS. 6 and 7 in conjunction with FIG. 1, a plurality of terminals, generally designated 48, are mounted within adapter 14, particularly within inner housing 28 of the adapter. The terminals are stamped and formed from conductive sheet metal material. For instance, FIGS. 6 and 7 show the terminals in an array, stamped as a "blank" from the sheet metal material, but interconnected to a carrier strip 50 of the sheet metal material by a plurality of respective webs 52. Each terminal includes a first contact portion 48a in the form

of a contact pad for engaging a respective one of the mating contacts 24 (Fig. 4) of standard memory card connector 16. When assembled in the adapter, contact pads 48a are exposed in open windows 38 in bottom wall 30 of base housing 26 as seen in FIG. 3.

5 Each terminal 48 includes a contact arm 48b having a second contact portion 48c of the terminal at a distal end of the contact arm. Contact arms 48b of the terminals are cantilevered forwardly into inner cavity 20 as best seen in FIG. 1, and contact portions 48c are adapted for engaging appropriate contacts of the miniature memory card 18 (Fig. 4) when the miniature card is inserted into the inner cavity.

10 Each terminal 48 includes a mounting section 48d intermediate the opposite ends thereof and joined to contact pads 48a by tying portions 48e. Barbs 48f are formed at opposite edges of mounting sections 48d.

Referring to FIG. 8 in conjunction with FIGS. 6 and 7, terminals 48 can be "gang" inserted into terminal-receiving passages 44 of inner housing 28 in the direction of arrow "C". After insertion, the terminals are removed from carrier strip 50 by severing webs 52.

15 Mounting sections 48d of the terminals are press-fit into the terminal-receiving passages, as barbs 48f (Figs. 6 and 7), bite into the plastic material of the inner housing within the passages. This subassembly of FIG. 8 then can be mounted in base housing 26 as seen in FIG. 1, and inner housing 28 can be welded to the top surface of bottom wall 30 of the base housing. Support projections 40 and partitions 40a position and isolate contact pads 48a from each other as shown in FIG. 1. When miniature memory card 18 is inserted into adapter 14

20 as shown in FIG. 10, contacts 54 on the bottom front surface of the miniature card engage contact portions 48c at the distal ends of contact arms 48b of terminals 48. It can be seen that single terminals 48 interconnect the contacts 54 of the miniature memory card with mating contacts 24 of the larger standard card connector 16. As seen in FIG. 7, all of the terminals have equal lengths "l" that is measured from barbs 48f to the distal ends of contact arms 48b.

25 In other words, all of the terminals have substantially equal effective spring lengths as measured from the rigid press-fit mounting sections 48d to the contact portions of the terminals that engage the miniature card. Accordingly, all of the contact portions are formed to have substantially equal resiliency.

30 Referring to FIG. 11 in conjunction with FIG. 9, a reinforcing plate, generally designated 56, is provided and runs generally parallel to inner housing 28 at the rear thereof. It can be seen in FIG. 9 that the reinforcing plate substantially spans the terminals. The reinforcing plate is provided for reinforcing the strength of base housing 26 and may be stamped and formed of metal material, such as stainless steel. However, a suitable molded

plastic component is contemplated. As seen best in FIG. 11, the reinforcing plate includes a narrow band or body portion 58 that runs generally parallel to inner housing 28 as seen in FIG. 9. A pair of L-shaped legs 60 and 62 are formed at opposite ends of body portion 58, and an abutment member 64 is formed intermediate the opposite ends of the body portion.

5 Abutment member 64 abuts against a rear surface of inner housing 28. Leg 62 is provided with a lock arm 66 extending substantially perpendicular to body portion 58.

When reinforcing plate 56 is assembled as shown in FIG. 9, legs 60 and 62 stand on bottom wall 30 (Fig. 1) of base housing 26. Body portion 58 of the reinforcing plate is supported on support projections 40 (Fig. 1) so that a clearance is provided between the body

10 portion and the terminals to prevent any short circuiting therebetween. This can be seen in FIG. 12. Lock arm 66 of the reinforcing plate extends along side wall 34 at one side of inner cavity 20 which receives the miniature memory card.

A lock portion 68 is provided at the distal end of lock arm 66 to align with a cut-out 70 in one edge of miniature memory card 18. Accordingly, as the miniature card is inserted

15 into inner cavity 20, the side edge of the miniature card engages lock portion 68 and biases lock arm 66 outwardly until the lock portion is aligned with cut-out 70 upon which the lock portion snaps into the cut-out to hold the miniature card in its fully inserted position within cavity 20.

Lock portion 68 has a knob 72 at an opposite side thereof as seen in FIG. 11. Knob

20 72 is exposed at the bottom surface of adapter 14 as seen in FIG. 3. Accordingly, the knob can be operated externally of the adapter to disengage lock portion 68 from cut-out 70 in the side edge of the miniature memory card to remove the card from the adapter.

After reinforcing plate 56 is mounted in the connector, a cover plate 76 is mounted on the base housing over the reinforcing plate. The cover plate is fabricated of dielectric plastic

25 material. In addition, a metal shell 78 is mounted adjacent the cover plate as can be seen in FIG. 2. The cover plate forms the top of inner cavity 20.

It will be understood that the invention may be embodied in other specific forms without departing from the spirit or central characteristics thereof. The present examples and embodiments, therefore, are to be considered in all respects as illustrative and not restrictive,

30 and the invention is not to be limited to the details given herein.



**CLAIMS:**

What is claimed is:

1. An adapter for a memory card connector to enable a miniature memory card to be inserted into a larger, standard memory card connector, comprising:
  - 5 a housing means of a size and shape to simulate a standard memory card and including an inner cavity for receiving a miniature memory card; and
  - a plurality of terminals mounted on the housing means, each terminal including a first contact portion at one end thereof for engaging an appropriate contact on the standard memory card connector and a second contact portion at an opposite end thereof for engaging
  - 10 an appropriate contact of the miniature memory card.
2. The adapter of claim 1 wherein said housing means include a base housing defining a substantial portion of said inner cavity.
3. The adapter of claim 2 wherein said housing means include an inner housing on which the terminals are mounted.
4. The adapter of claim 3 wherein said inner housing is separate from and independent of the base housing.
5. The adapter of claim 4 wherein said inner housing is integrally welded to the base housing.
6. The adapter of claim 1 wherein said terminals are stamped and formed of conductive sheet metal material.
7. The adapter of claim 1 wherein said housing means include a base housing and an inner housing, the terminals having mounting sections between said opposite ends thereof, the mounting sections being press-fit into terminal-receiving passages in said inner housing.
8. The adapter of claim 7 wherein said inner housing is separate from and independent of the base housing.

9. The adapter of claim 2 wherein said housing means include a base housing and an inner housing, the inner housing mounting the terminals, and including a reinforcing plate supporting the housing means.

10. The adapter of claim 9 wherein said inner housing is separate from and independent of the base housing.

11. The adapter of claim 10 wherein said inner housing comprises an elongated bar, and said reinforcing plate comprises a narrow band running generally parallel to the inner housing.

12. The adapter of claim 9 wherein said reinforcing plate includes a lock member engageable with the miniature memory card inserted into the inner cavity.

13. An adapter for a memory card connector to enable a miniature memory card to be inserted into a larger, standard memory card connector, comprising:

a two-part housing means of a size and shape to simulate a standard memory card and including an inner cavity for receiving a miniature memory card, the housing means

5 including a base housing defining a substantial portion of said inner cavity and an inner housing separate from and independent of the base housing; and

a plurality of terminals stamped and formed of conductive sheet metal material, each terminal including a first contact portion at one end thereof for engaging an appropriate contact on the standard memory card connector, a second contact portion at an opposite end thereof for engaging an appropriate contact of the miniature memory card and a mounting section between said opposite ends, the mounting sections of the terminals being press-fit into terminal-receiving passages in the inner housing.

14. The adapter of claim 13 wherein said inner housing is integrally welded to the base housing.

15. The adapter of claim 13, including a reinforcing plate supporting the base housing.

16. The adapter of claim 15 wherein said inner housing comprises an elongated bar, and said reinforcing plate comprises a narrow band running generally parallel to the inner housing.

17. The adapter of claim 16 wherein said reinforcing plate includes a lock member engageable with the miniature memory card inserted into the inner cavity.

18. A method of fabricating an adapter for a memory card connector to enable a miniature memory card to be inserted into a larger, standard memory card connector, comprising the steps of:

5 providing a two-part housing means of a size and shape to simulate a standard memory card and including a base housing defining a substantial portion of an inner cavity for receiving a miniature memory card and an inner housing separate from and independent of the base housing;


10 providing a plurality of terminals with each terminal including a first contact portion at one end thereof for engaging an appropriate contact on the standard memory card connector and a second contact portion at an opposite end thereof for engaging an appropriate contact of the miniature memory card;

mounting said terminals on the inner housing of said two-part housing means to define a subassembly; and


15 mounting said subassembly of the terminals and the inner housing on the base housing.

19. The method of claim 18 wherein said base housing and said inner housing are fabricated of plastic material, and the inner housing, with the terminals assembled thereto, is ultrasonically welded to the base housing.


20. The method of claim 18 wherein said terminals are press-fit into terminal-receiving passages in said inner housing.

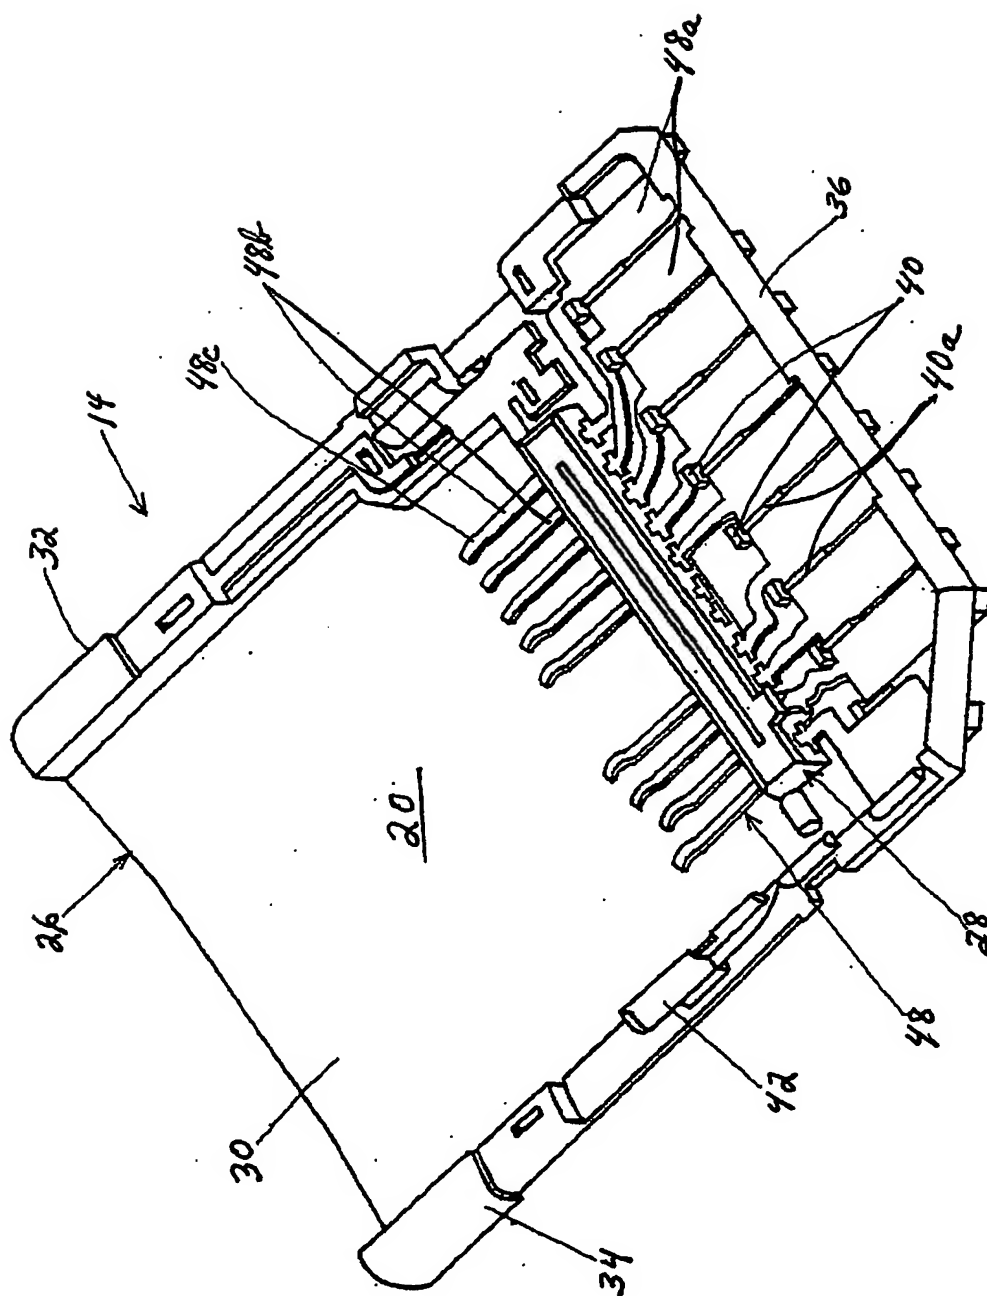

**FIG. 1**

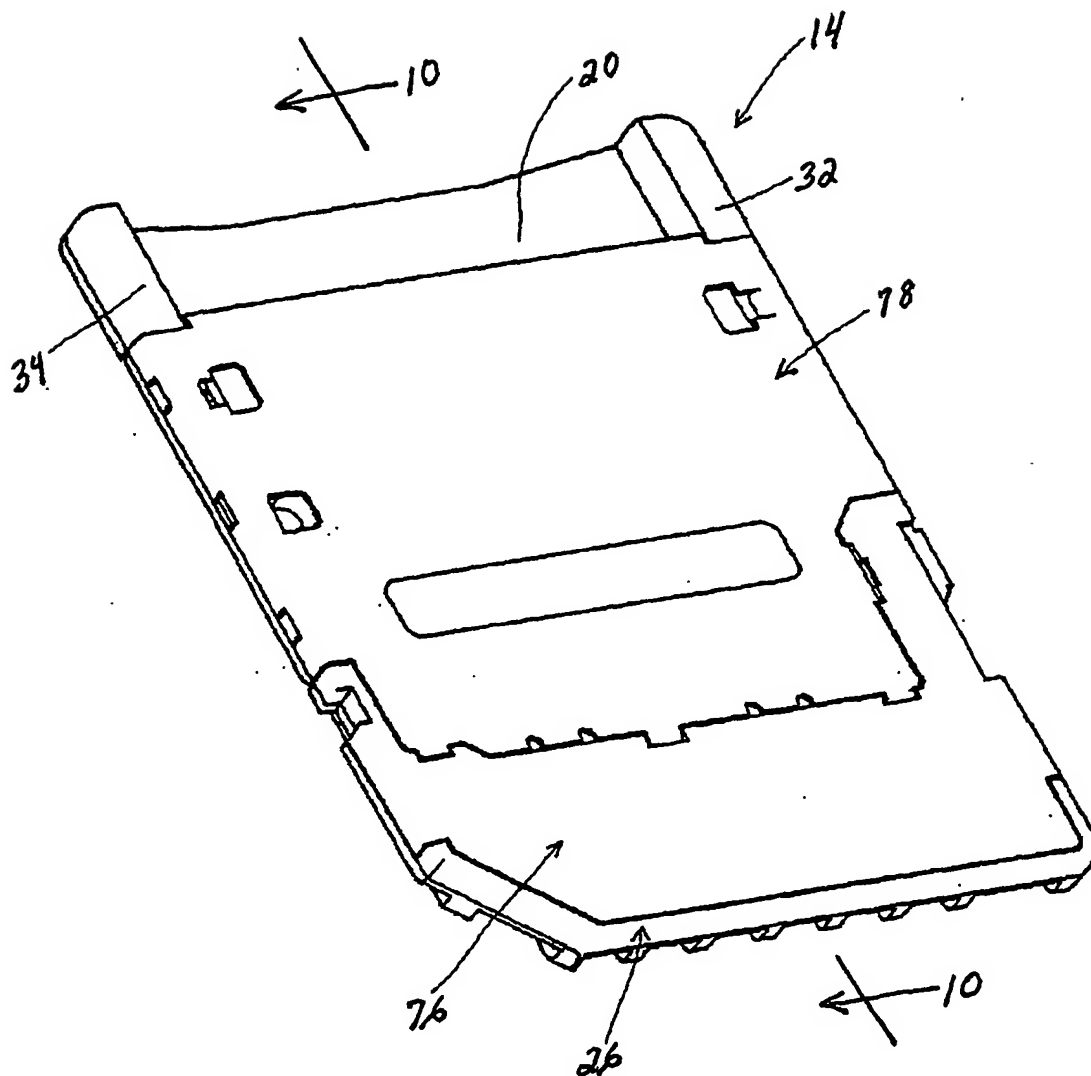**FIG. 2**

**FIG. 3**

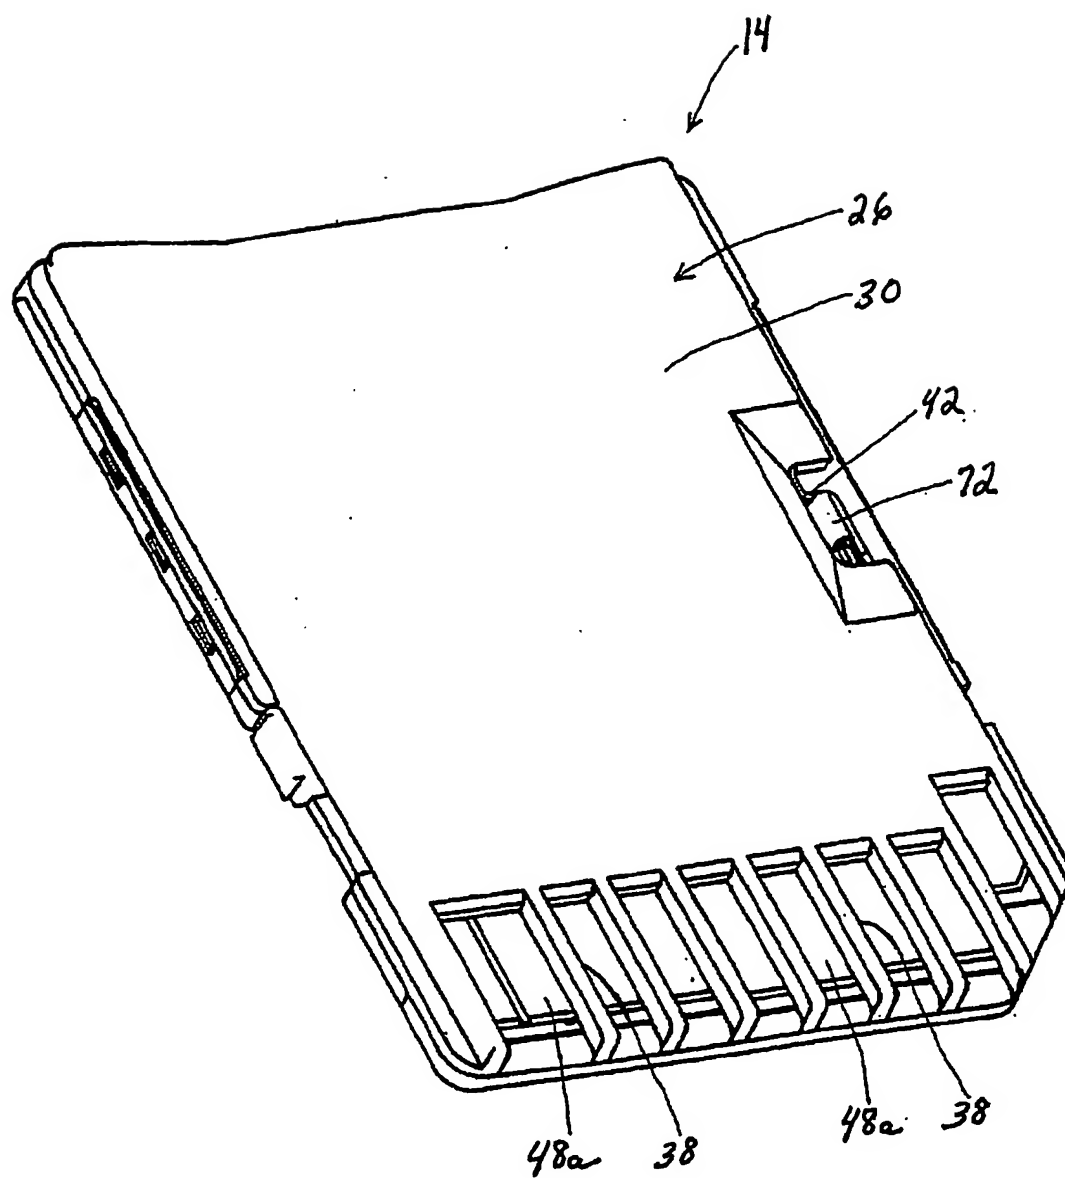

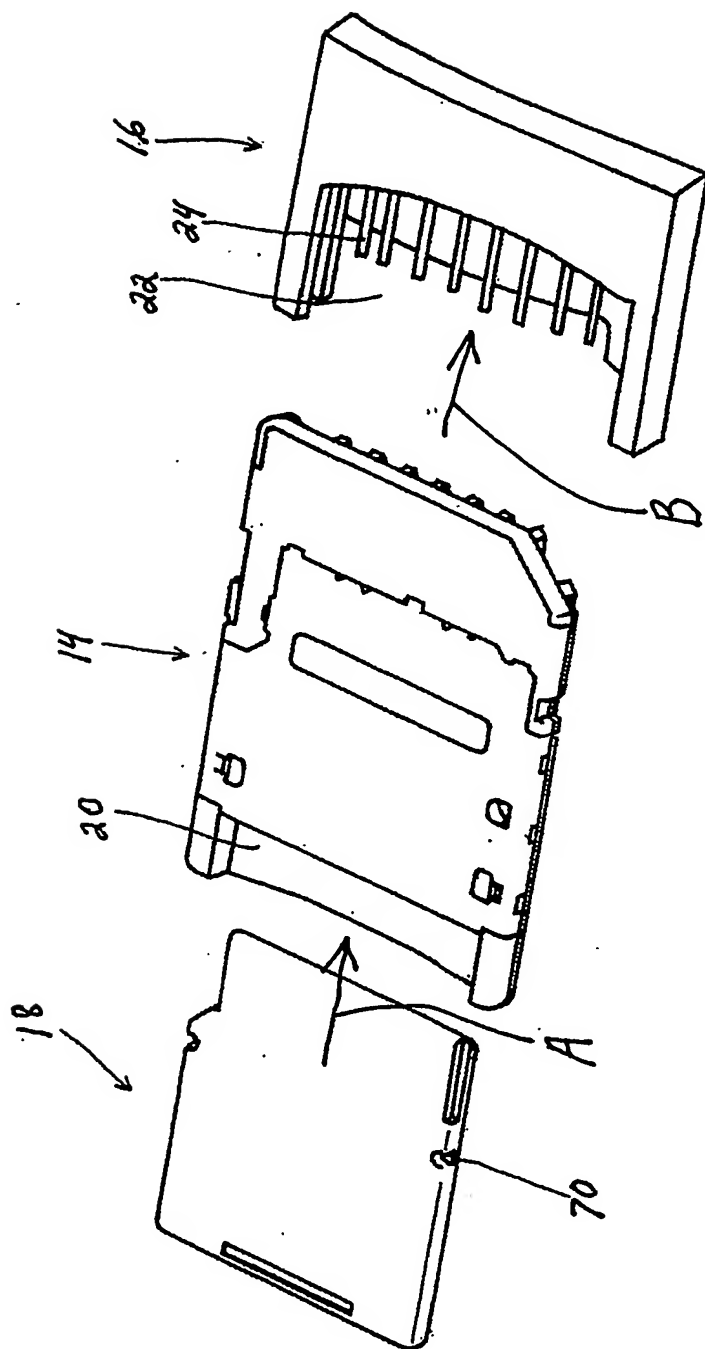
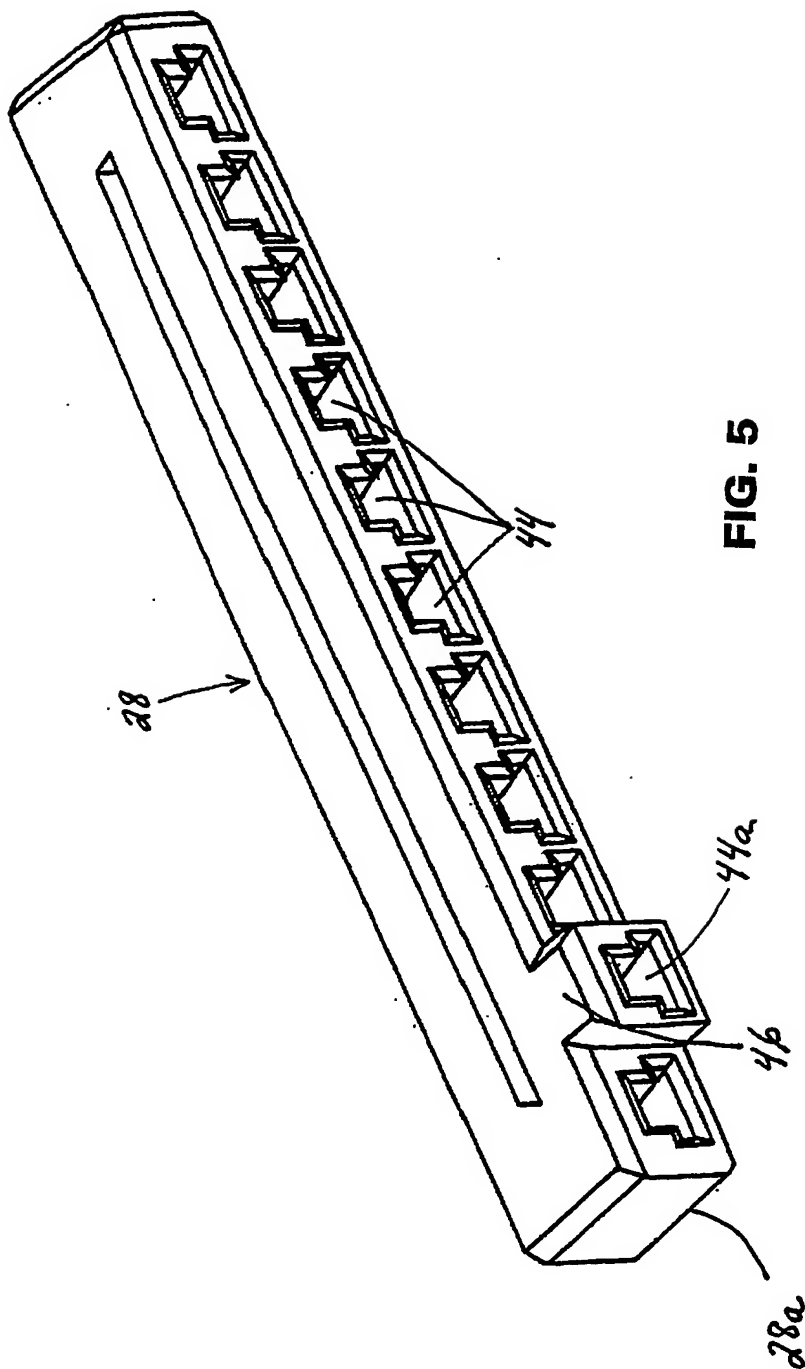


FIG. 4





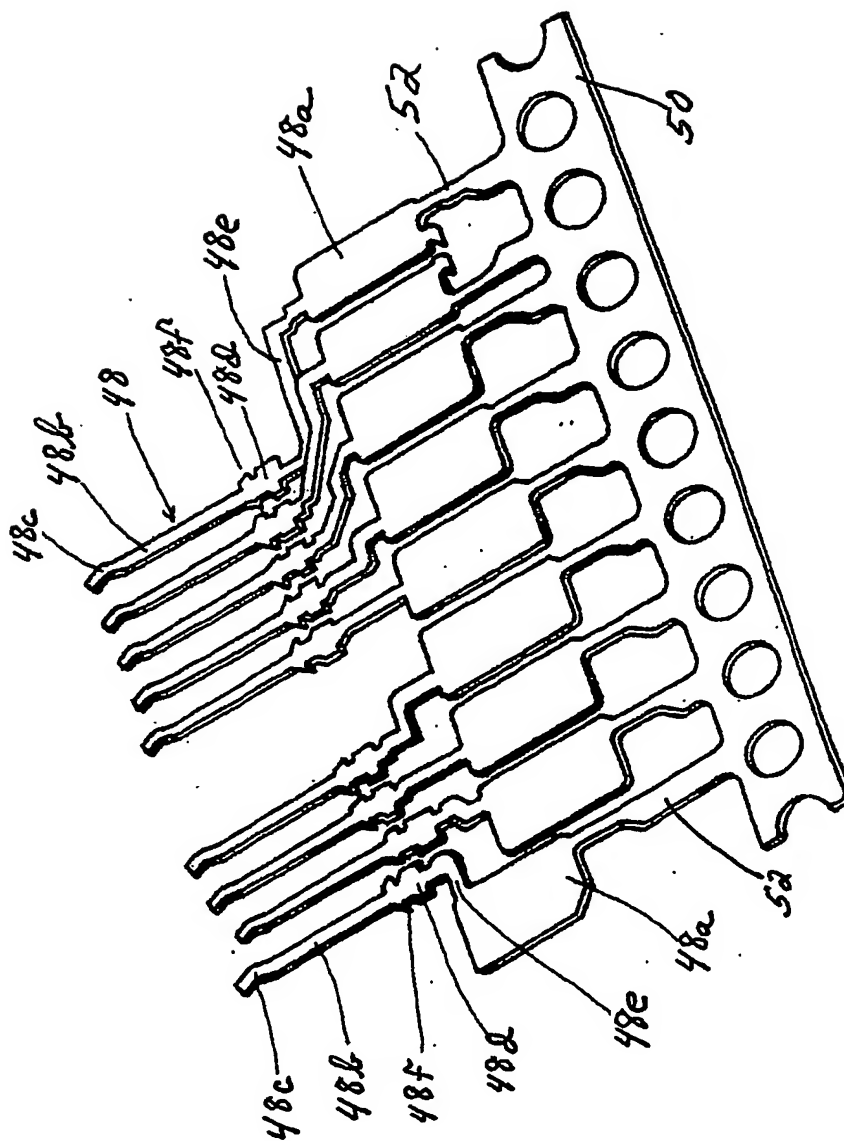


FIG. 6

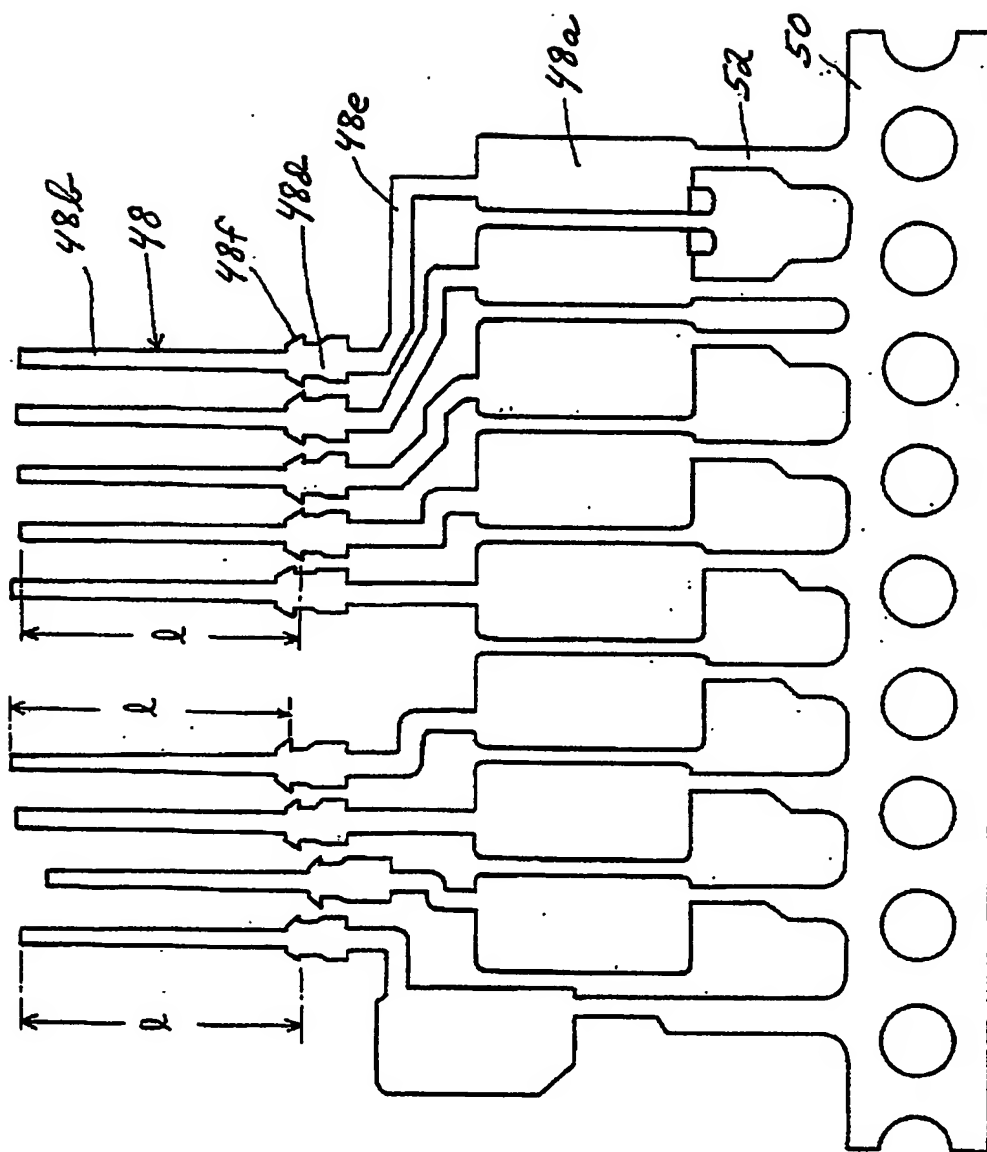


FIG. 7

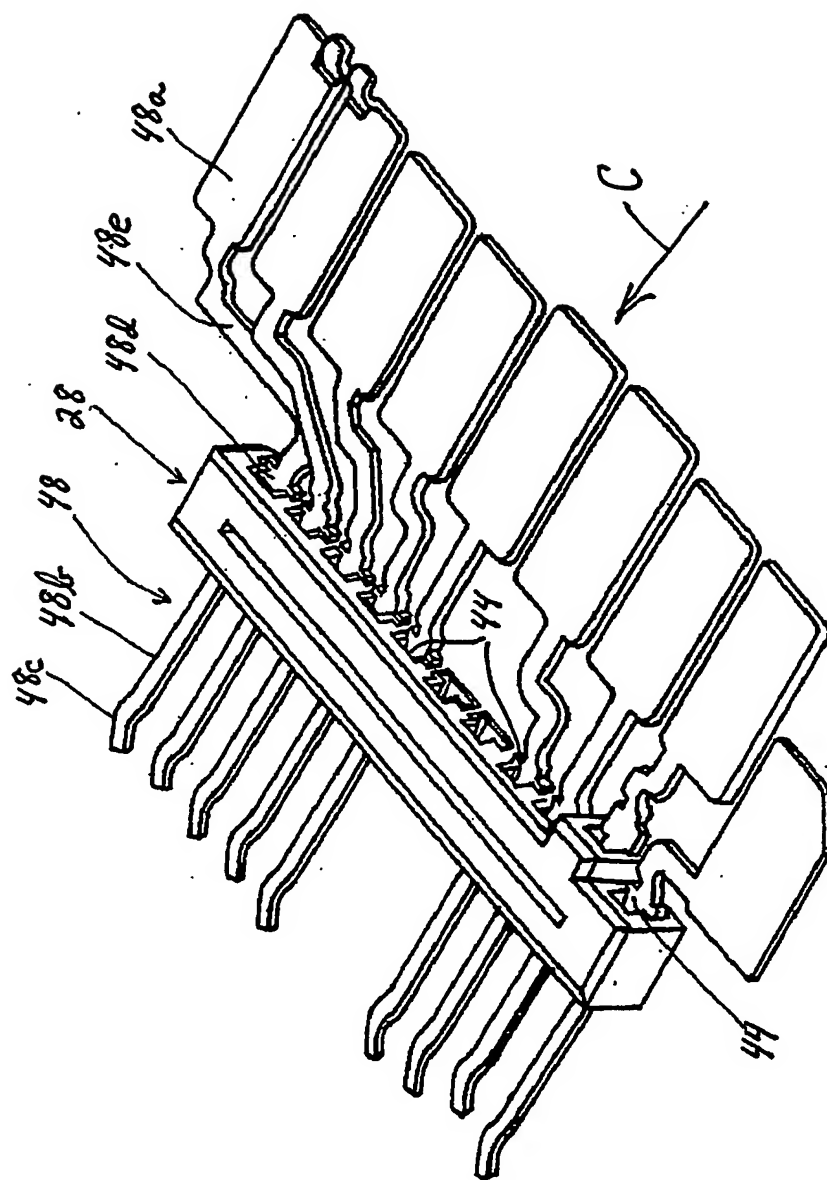


FIG. 8

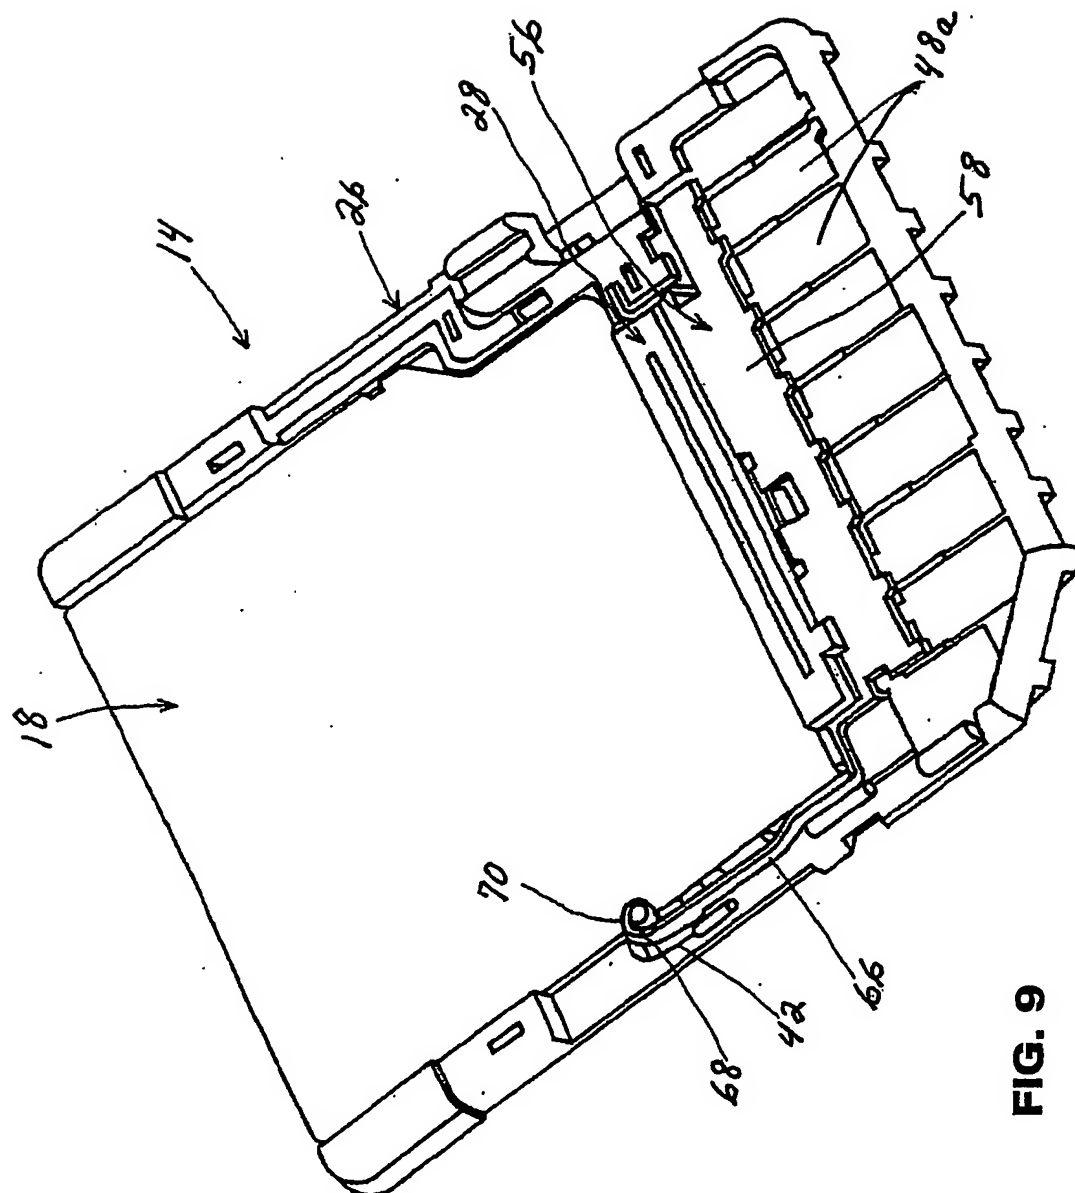


FIG. 9



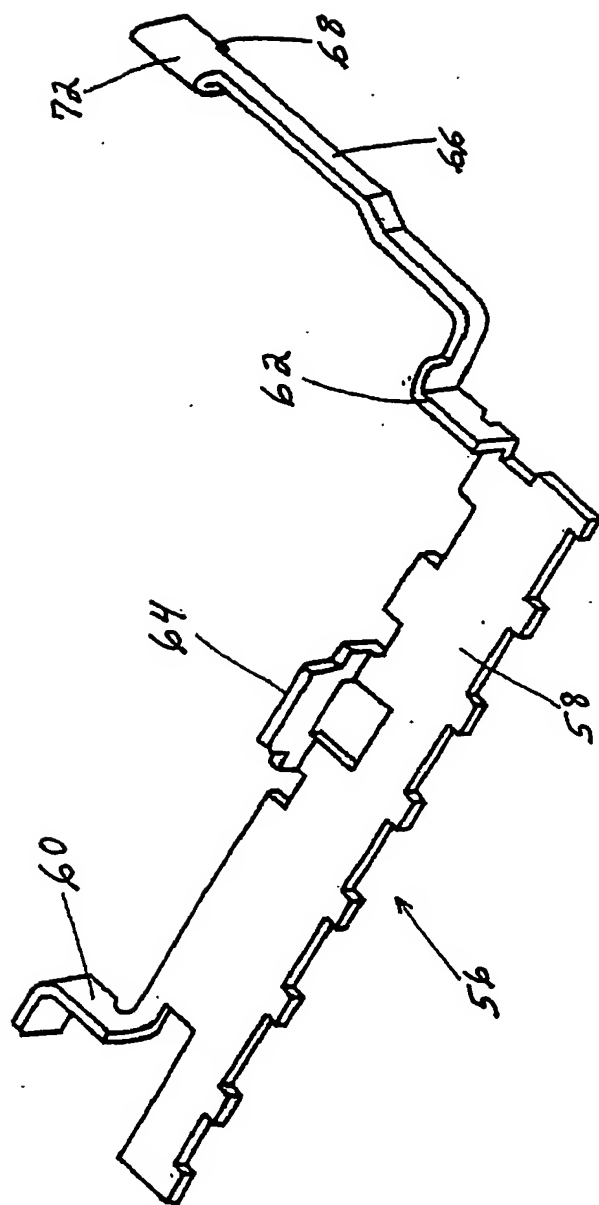


FIG. 11

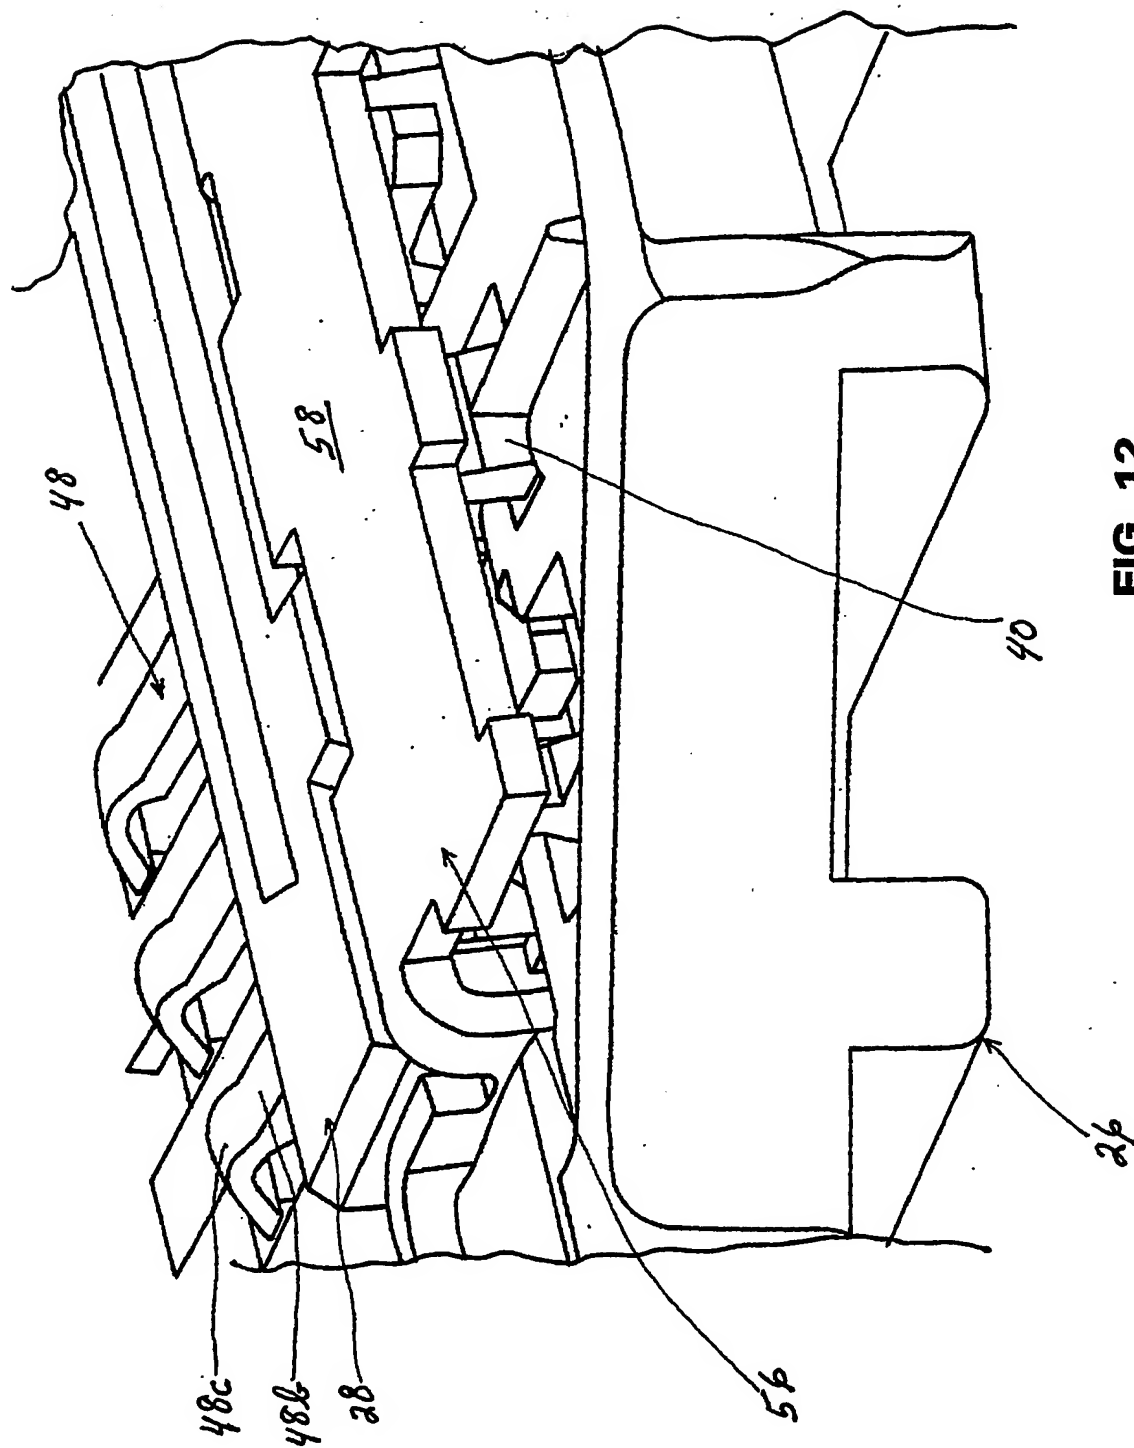


FIG. 12

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/31881

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H01R31/06 H01R23/02

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 752 857 A (A.J.KNIGHTS) 19 May 1998 (1998-05-19)	1-4, 18
A	column 4, line 10 - line 49 column 5, line 37 - line 41; figures 4,6a	13
Y	EP 0 939 582 A (JAPAN SOLDERLESS TERMINAL) 1 September 1999 (1999-09-01)	1-4, 18
A	column 6, line 21 - line 50 column 8, line 38 - column 9, line 4; figures 1-5c	8,10,13
A	EP 1 052 590 A (JST) 15 November 2000 (2000-11-15) page 6, line 39 - page 7, line 7; figure 3	1,13,18

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the International filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the International filing date but later than the priority date claimed

- \*T\* later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the International search

18 February 2004

Date of mailing of the International search report

25/02/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Alexatos, G



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 03/31881

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5752857	A	19-05-1998	AU 701349 B2	28-01-1999
			AU 2930097 A	09-12-1997
			BR 9709579 A	09-05-2000
			CN 1219294 A	09-06-1999
			EP 0901696 A1	17-03-1999
			JP 3105264 B2	30-10-2000
			JP 11511894 T	12-10-1999
			KR 2000010785 A	25-02-2000
			NO 985488 A	25-01-1999
			TW 472184 B	11-01-2002
			WO 9744867 A1	27-11-1997
EP 0939582	A	01-09-1999	JP 3285321 B2	27-05-2002
			JP 11251019 A	17-09-1999
			EP 0939582 A2	01-09-1999
			TW 412886 B	21-11-2000
			US 6203378 B1	20-03-2001
EP 1052590	A	15-11-2000	JP 2000305662 A	02-11-2000
			CN 1278631 A	03-01-2001
			EP 1052590 A1	15-11-2000
			TW 448593 B	01-08-2001
			US 6264506 B1	24-07-2001

(19) World Intellectual Property  
Organization  
International Bureau



21 APR 2005



(43) International Publication Date  
13 May 2004 (13.05.2004)

PCT

(10) International Publication Number  
**WO 2004/040714 A1**

- (51) International Patent Classification<sup>7</sup>: **H01R 31/06**
- (21) International Application Number:  
PCT/US2003/031881
- (22) International Filing Date: 8 October 2003 (08.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
310419/2002 25 October 2002 (25.10.2002) JP
- (71) Applicant (for all designated States except US): **MOLEX INCORPORATED** [US/US]; 2222 Wellington Court, Lisle, IL 60532 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **KOJIMA, Yutaka** [JP/JP]; 141-3 Azumano, Seya-ku, Yokohama-shi, Kanagawa 246-0012 (JP). **HIRATA, Hideyuki** [JP/JP]; Nisshin Palace Stage Sakuragaoka 606, 2342-1 Fukudu, Yamato-shi, Kanagawa-ken 242-0024 (JP).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


**Published:**

- with international search report
- with amended claims

Date of publication of the amended claims: 29 July 2004

[Continued on next page]

(54) Title: MEMORY CARD ADAPTER FOR CONNECTING A MINIATURE CARD TO A STANDARD CARD CONNECTOR, ALONG WITH A METHOD OF FABRICATING SAME

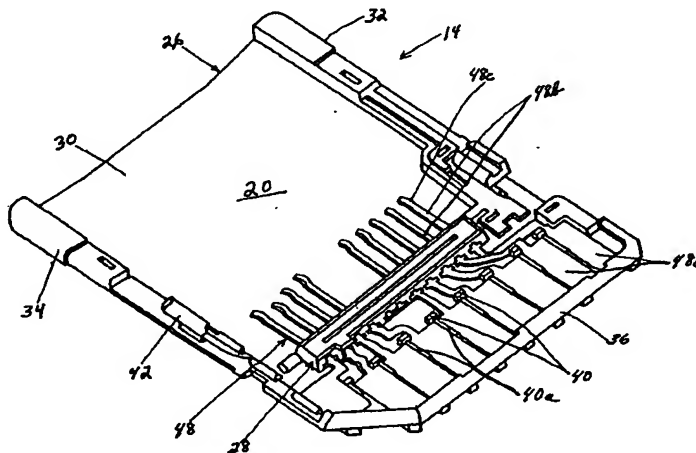

(57) Abstract: An adapter, along with a method of fabricating the adapter, for a memory card connector to enable a miniature memory card to be inserted into a larger, standard memory card connector. A two-part housing is provided of a size and shape to simulate a standard memory card. The housing includes a base housing part defining a substantial portion of an inner cavity for receiving a miniature memory card. An inner housing part is separate from and independent of the base housing part. A plurality of terminals are mounted on the inner housing part to define a subassembly which is mounted on the base housing part. Each terminal includes a first contact portion at one end thereof for engaging an appropriate contact on the standard memory card connector. Each terminal includes a second contact portion at an opposite end thereof for engaging an appropriate contact of the miniature memory card.

WO 2004/040714 A1

WO 2004/040714 A1



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**AMENDED CLAIMS**

[received by the International Bureau on 26 April 2004 (26.04.04);  
original claims 1-20 replaced by amended claims 1-5]

**CLAIMS**

1. An adapter (14) for a memory card connector to enable a miniature memory card (18) to be inserted into a larger, standard memory card connector (16), comprising:

a two-part housing means (26,28) of a size and shape to simulate a standard memory card and including an inner cavity (20) for receiving a miniature memory card (18), the housing means including a base housing (26) defining a substantial portion of said inner cavity and an inner housing (28) separate from and independent of the base housing; and

a plurality of terminals (48) stamped and formed of conductive sheet metal material, each terminal including a first contact portion (48a) at one end thereof for engaging an appropriate contact (24) on the standard memory card connector (16), a second contact portion (48c) at an opposite end thereof for engaging an appropriate contact (54) of the miniature memory card (18) and a mounting section (48d) between said opposite ends, the mounting sections of the terminals being press-fit into terminal-receiving passages (44) in the inner housing (28).

2 2. The adapter of claim 1 wherein said inner housing (28) is integrally welded to the base housing (26).

2 3. The adapter of claim 1, including a reinforcing plate (56) supporting the base housing (26).

2 4. The adapter of claim 3 wherein said inner housing (28) comprises an elongated bar, and said reinforcing plate (56) comprises a narrow band (58) running generally parallel to the inner housing.

2 5. The adapter of claim 4 wherein said reinforcing plate (56) includes a lock member (68) engageable with the miniature memory card (18) inserted into the inner cavity (20).